


Spacers Form F (Class 150)

Flexible up to the last millimetre! For lengths up to 20 mm we recommend spacers Form F made of solid PTFE.

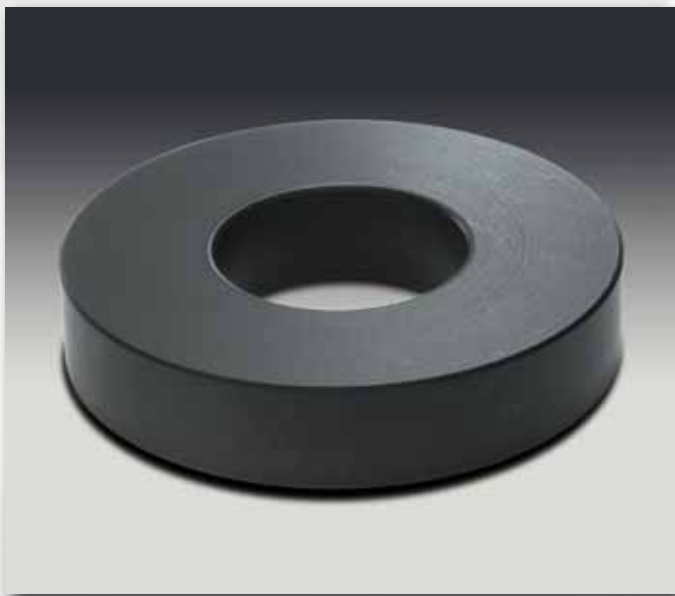

Spacers Form F (Class 150)

Material:

- PTFE (virgin or conductive)
- PP (up to nominal pipe size NPS 12")


Other pressure rates:

- Class 300

Special features:

- with reinforcement ring
- filled PTFE




























Form F






Spacers Form F are also available as **inclined spacers** with various degrees.

NPS	L (mm)			d ₁ (mm)	d ₂ (mm)	d ₈ (mm)	Weight (ca. kg/m)
	min.		max.				
1/2"	10	---	15	21,3	12	44	0,10
3/4"	10	15	20	26,7	15	54	0,10
1"	10	15	20	33,4	20	63	0,20
1 1/4"	10	15	20	42,2	29	73	0,25
1 1/2"	10	15	20	48,3	35	83	0,30
2"	10	15	20	60,3	45	101	0,40
2 1/2"	10	15	20	73,0	57	122	0,50
3"	10	15	20	88,9	70	133	0,60
4"	10	15	20	114,3	93	170	0,75
5"	10	15	20	141,3	119	194	1,10
6"	10	15	20	168,3	144	219	1,40
8"	10	15	20	219,1	191	273	2,00
10"	10	15	20	273,0	239	324	3,20
12"	10	15	20	323,8	290	405	4,00
14"	10	15	25	355,6	326	445	4,50
16"	10	15	25	406,4	372	510	5,20
18"	10	15	25	457,2	428	545	6,10
20"	10	15	25	508,0	480	600	7,20

L = Total length
d₁ = Outer diameter of the pipe
d₂ = Inner diameter
d₈ = Outer diameter

NPS	Possible vacuum		
	23°C	100°C	230°C
1"			
1 1/2"			
2"			
3"			
4"			
6"			
8"			
10"			
12"			

Vacuum resistance:

-  = full vacuum
-  = limited vacuum
-  = no vacuum

Please refer to the next nominal pipe size if your nominal pipe size is not listed.